

# CAMSO MPT 753



TELEHANDLERS



COMPACT  
WHEEL  
LOADERS



MINI-  
DUMPERS



## THE NEXT GENERATION IN VERSATILITY AND DURABILITY

Engineered to provide enhanced traction in a variety of surface applications without sacrificing ride quality. Excellent overall durability and puncture resistance ensure maximum service life.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



# CAMSO MPT 753



**FLAT NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO**

- Enhances stability, ride quality and durability

**VOID GUARD IMPACT PROTECTION**

- Protects from tread punctures to minimize flat tires

**IMPACT GUARD SIDEWALL DESIGN**

- Deflects debris to better protect sidewalls and reduce stress cracking

**STEPPED AND OPEN SHOULDER LUGS**


- Enhances traction on softer surfaces for better versatility

TIRE SIZE	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	APPLI-CATION	MAXIMUM TIRE LOAD [kg]						
		Recom-mended	Alternative	O.D. [mm]	O.W. [mm]	O.T.D. [mm]				Inflation pressure [bar]	STATIC	5 km/h	10 km/h	15 km/h	30 km/h	50 km/h
340/80-18 IND (12.5-18; 335/80-18)	TL	11	12; 11 SDC; 12 SDC; W10; W11	1005	350	21	143	A8	CYCLIC	4.00	6270	4550*	4090**	3650	2915	2480
									CONSTANT	4.00	6270	3950	3405	3080	2835	2480
340/80-20 IND (12.5-20; 335/80-20)	TL	11	12; 11 SDC; 12 SDC; W10; W11	1067	355	25	144	A8	CYCLIC	4.00	6440	4675*	4200**	3750	2995	2550
									CONSTANT	4.00	6440	4060	3500	3165	2910	2550
400/70-20 IND (405/70-20; 16.0/70-20)	TL	13	DW12; 13 SDC; DW13; DW13L; DW14L	1100	405	27	155	A8	CYCLIC	5.00	8915	6470*	5815**	5195	4145	3525
									CONSTANT	5.00	8915	5620	4845	4380	4030	3525
400/70-24 IND (405/70-24; 16.0/70-24)	TL	13	DW12; 13SDC; DW13; DW13L; DW14L; TW13; TW14L	1187	402	29	158	A8	CYCLIC	5.00	9775	7100*	6375**	5695	4550	3870
									CONSTANT	5.00	9775	6165	5315	4805	4420	3870
400/80-24 IND (15.5/80-24)	TL	DW13	DW12; DW13L; DW14L; TW13; TW14L	1244	412	33	162	A8	CYCLIC	5.00	10925	7935*	7125**	6365	5085	4325
									CONSTANT	5.00	10925	6890	5940	5370	4940	4325
460/70-24 IND (17.5L-24)	TL	DW15L	DW14L; DW16L; TW14L; TW15L; TW16L	1251	452	33	159	A8	CYCLIC	4.00	10065	7305*	6565**	5865	4680	3980
									CONSTANT	4.00	10065	6345	5470	4945	4550	3980

\* Cyclic: One way distance up to 150 m

\*\* Cyclic: One way distance up to 600 m

## TIRE LIFE

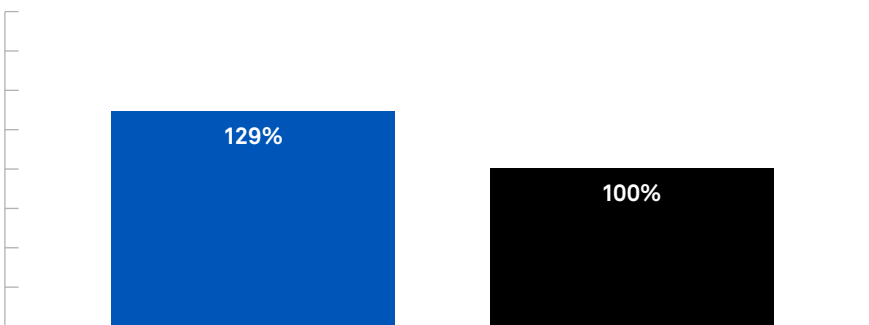

**CAMSO MPT 753**

**SOLIDEAL 4L I3**

Due to better rubber compound and an optimized tread design, Camso MPT 753 demonstrated 29% better life performance compared to Solideal 4L I3 in controlled conditions.

AUTHORIZED DISTRIBUTOR:

[camso.co](http://camso.co)



FORMERLY CAMOPLAST SOLIDEAL